



XA-2020T



Material: A6063-T5 / Clear Anodize  
Mass: 0.50 kg./m.

4-6 M. MAX. LENGTH


XA-2020H



Material: A6063-T5 / Clear Anodize  
Mass: 0.42 kg./m.

4-6 M. MAX. LENGTH


XA-2525T



Material: A6063-T5 / Clear Anodize  
Mass: 0.78 kg./m.

4 M. MAX. LENGTH


XA-2040T



Material: A6063-T5 / Clear Anodize  
Mass: 0.88 kg./m.

4-6 M. MAX. LENGTH


XA-2020R



Material: A6063-T5 / Clear Anodize  
Mass: 0.40 kg./m.

4 M. MAX. LENGTH


XA-4040T-2S



Material: A6063-T5 / Clear Anodize  
Mass: 1.30 kg./m.

4 M. MAX. LENGTH


XA-2060T



Material: A6063-T5 / Clear Anodize  
Mass: 1.26 kg./m.

4 M. MAX. LENGTH


XA-2080T



Material: A6063-T5 / Clear Anodize  
Mass: 1.65 kg./m.

4 M. MAX. LENGTH


XA-2020CT



Material: A6063-T5 / Clear Anodize  
Mass: 0.52 kg./m.

4 M. MAX. LENGTH


XA-2020CH



Material: A6063-T5 / Clear Anodize  
Mass: 0.54 kg./m.

4 M. MAX. LENGTH


XA-2020CL



Material: A6063-T5 / Clear Anodize  
Mass: 0.53 kg./m.

4 M. MAX. LENGTH


XA-2020CU



Material: A6063-T5 / Clear Anodize  
Mass: 0.56 kg./m.


4 M. MAX. LENGTH

DD-20

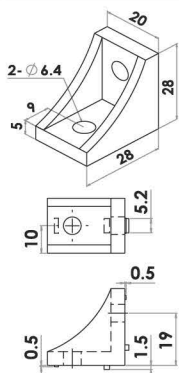


Mat'l: ADC12  
Allowable Load: 83 kgf.  
Applicable Parts:

M5 x 10 2 PCS.




DCS-20

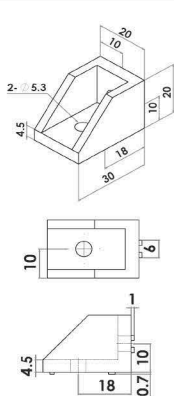


Mat'l: ADC12  
Allowable Load: 83 kgf.  
Applicable Parts:

M5 x 10 2 PCS.




DC-20

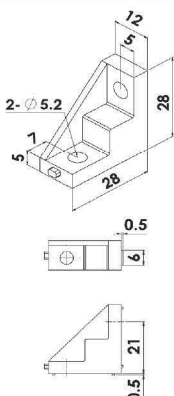


Mat'l: ADC12  
Allowable Load: 83 kgf.  
Applicable Parts:

M5 x 10 2 PCS.




HH-20




Mat'l: A6063-T5  
Allowable Load: 83 kgf.  
Applicable Parts:

M5 x 10 2 PCS.




HB-20




Mat'l: A6063-T5  
Allowable Load: 83 kgf.  
Applicable Parts:

M5 x 16 2 PCS.




LB-20




Mat'l: A6063-T5  
Allowable Load: 68 kgf.  
Applicable Parts:

M5 x 8 2 PCS.




HH-2040




Mat'l: A6063-T5 / Clear Anodize  
Allowable Load: 147 kgf.  
Applicable Parts:

M5 x 10 4 PCS.




LB-2040




Mat'l: A6063-T5 / Clear Anodize  
Allowable Load: 118 kgf.  
Applicable Parts:

M5 x 8 4 PCS.




HH-8H-2040




Mat'l: A6063-T5 / Clear Anodize  
Allowable Load: 215 kgf.  
Applicable Parts:

M5 x 10 8 PCS.




HH-2060




Mat'l: A6063-T5 / Clear Anodize  
Allowable Load: 147 kgf.  
Applicable Parts:

M5 x 10 6 PCS.



LB-2060



Mat'l: A6063-T5 / Clear Anodize  
Allowable Load: 161 kgf.  
Applicable Parts:

M5 x 8 6 PCS.

